



# HD / series

product overview

### FHD、2K、 4K、 8K is Optional

By selecting different sizes and varying pixel pitch, various size magnitudes can be effortlessly attained, while simultaneously fulfilling the requirements of different resolutions.




### Product Features:

- FHD、2K、 4K、 8K is Optional
- Double backup offer more stable performance
- Furnished with comprehensive mounting accessories
- HDR is optional
- As slender as a book, with a thickness of merely 27.5mm
- Multiple installation way
- The control system can be selected to enable one-click start



## Double backup offer more stable performance


Key components of the product have been implemented with double backup. Even if some of them encounter an uncontrollable state under extreme circumstances, the product can still operate normally.

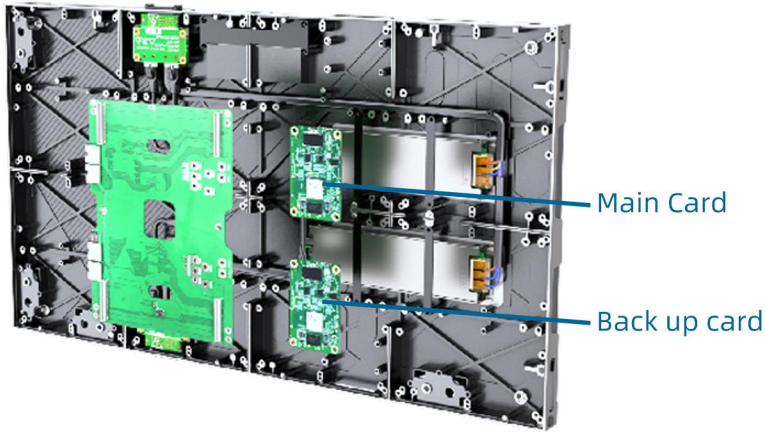

On important occasions, customers can have greater confidence in the operating status of the product.

## Furnished with comprehensive mounting accessories

The product is furnished with all the installation accessories, and you merely need to bring an electric batch to it.

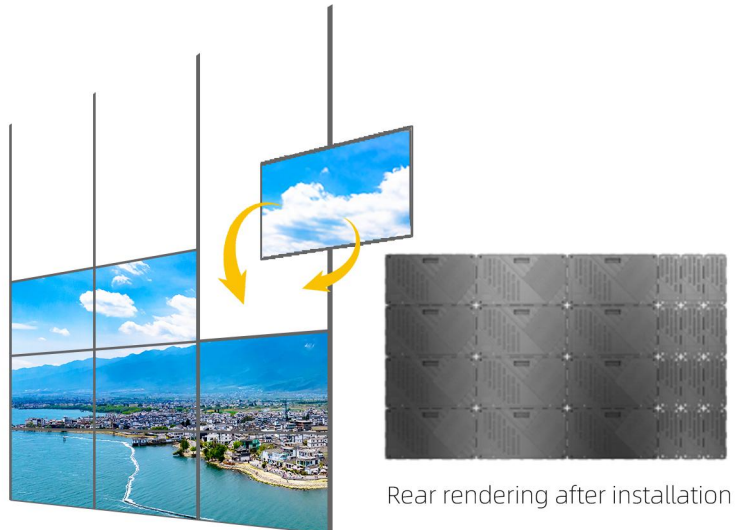

## The control system can be selected to enable one-click start

You have the option of choosing either Windows or Android, or you can opt for the full meeting screen projection system. This makes the presentation more effortless.






## Display effects

This is optional

### High dynamic

The dynamic range refers to the contrast between the brightest and darkest areas of an image. In backlight conditions, high-motion effects mimic the capabilities of the human eye by revealing details in both light and dark areas of the image.

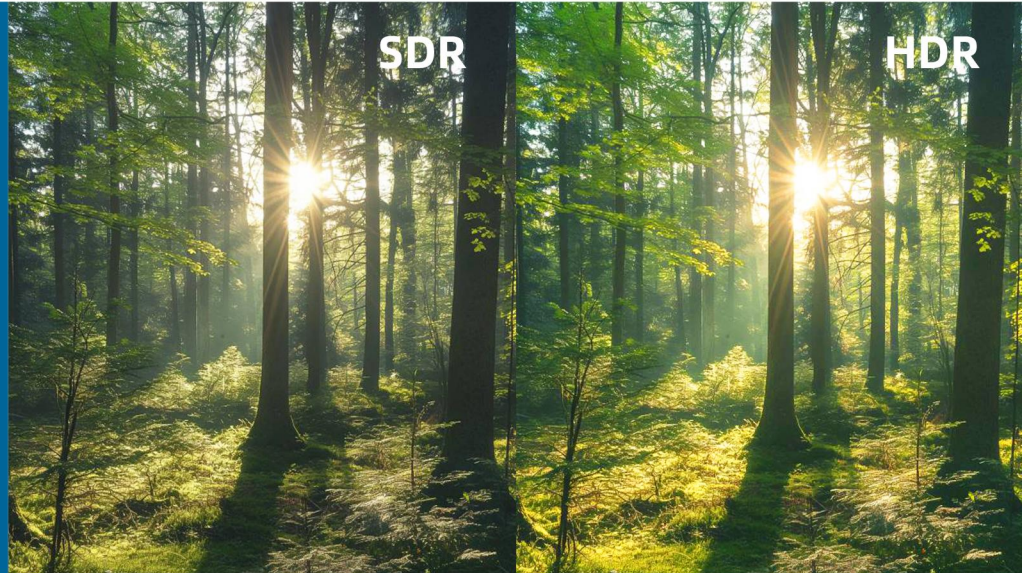

### Wide color gamut

From BT.709 to BT.2020 allows for more colors and richer colors, bringing the image closer to what we see in the real world.



### 10bit color depth

Higher color depth means more color shades. In the scene of dynamic lighting changes, light, shadow and color are expressed in aesthetic details, making the image more real, accurate and hierarchical.





**As slender as a book, with a thickness of merely 27.5mm**

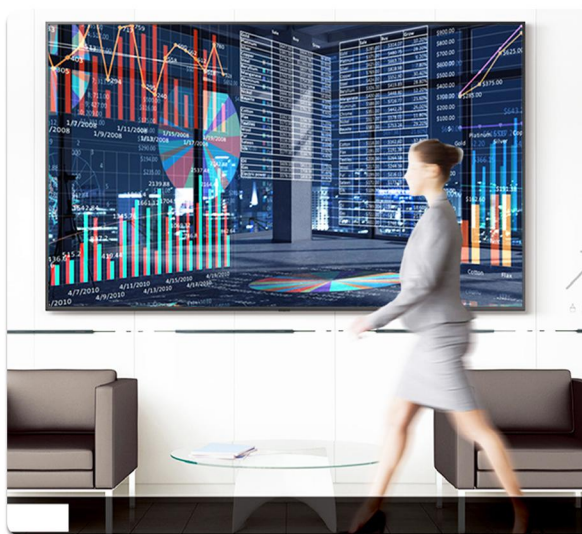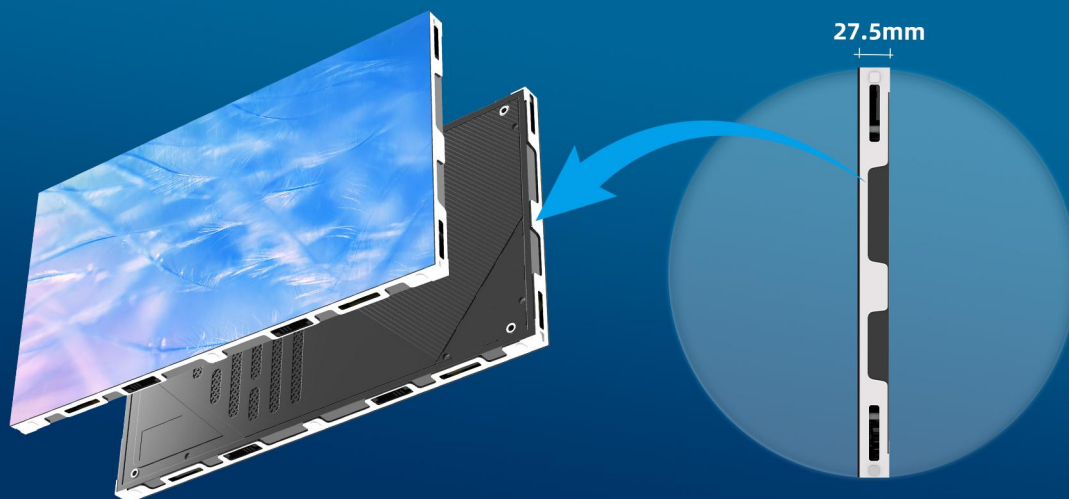

### Parameters

Model	HD12	HD15	HD18	HD25
Physical density(Dot/sqm)	640000	409600	284444	160000
Panel Resolution	480X270	384X216	320X180	240X135
Viewing Distance (m)	1	1.5	2	2.5
Panel Dimension (WXHXD/mm)	600x337.5x27.5			
Panel weight(kg)	4.5			
Maintenance Mode	Front maintenance			
Cabinet Material	Die-casting aluminum			
Brightness(Nits)	≥ 600			
Color temperature(K)	1000-18500 Optional			
Viewing angle(V/H)	170°/170°			
Brightness/Color uniformity	≥ 99.8%			
Contrast ratio	10000 : 1			
Frame frequency	50/60			
Grey level	14-16bit			
Refresh rate(Hz)	3840			
Max. power consumption(W/sqm)	350			
Avg. power consumption(W/sqm)	100			
Protection level	IP31			
Power input	AC90-264V,47-63Hz			
Working temperature/humidity(°C/RH)	-20~60°C/10%~85%			
Storage temperature/humidity(°C/RH)	-20~60°C/10%~85%			
Certificatiom	CE/RoHS/FCC/			

### Multiple installation way



Hanging



Wall mounting



Stacking



**HD**  
SERIRS



## **Cloud Visual Tech Limited**

Email: [marketing@cloudvisualtech.com](mailto:marketing@cloudvisualtech.com)  
Tel: +86 159 8957 8955  
Add: 10 Kaijing North Road, Pingshan  
District Shenzhen 518118, China.