


TM / series


product overview

Transparent and imperceptible design

The unique product design enables people to relish the wonderful video displayed on the glass.

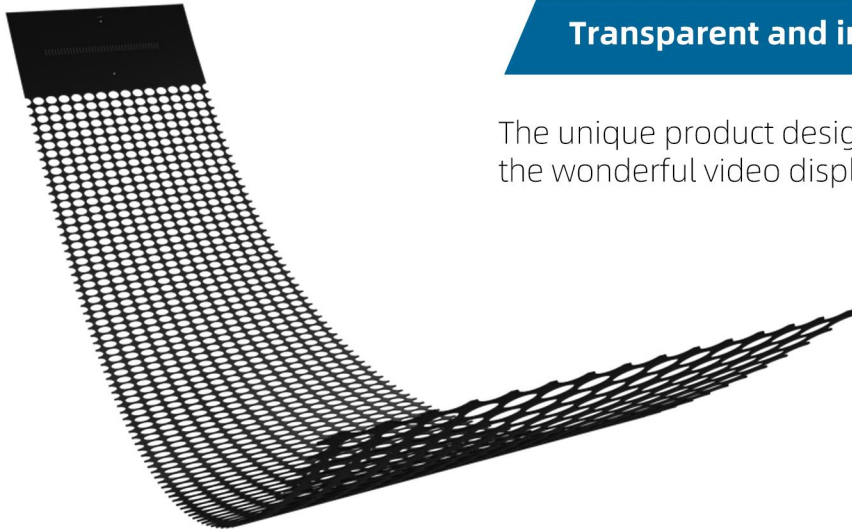


while the exquisite products in the window can also be flawlessly presented before people.

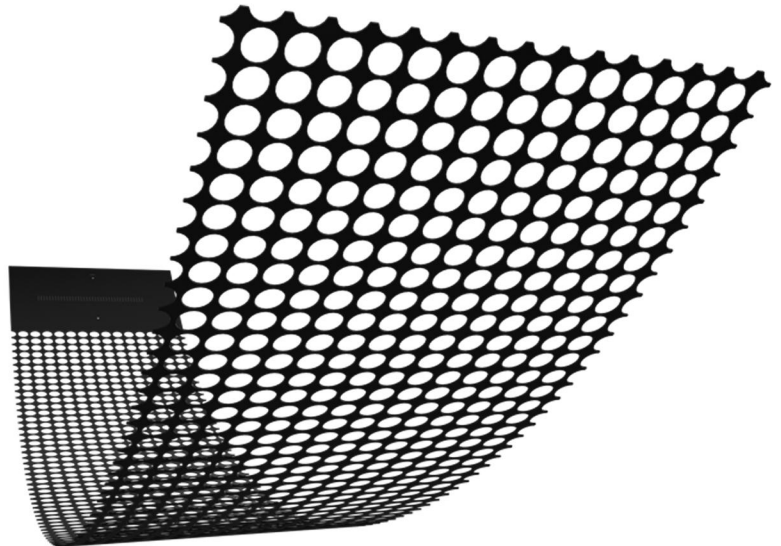

Product Features:

- light transmittance of above 90%
- naked-eye AR commercial display experience
- Flexible size could fit all different windows
- Depth less than 2mm
- brightness is 5000nits could always catching up the attention

naked-eye AR commercial display experience

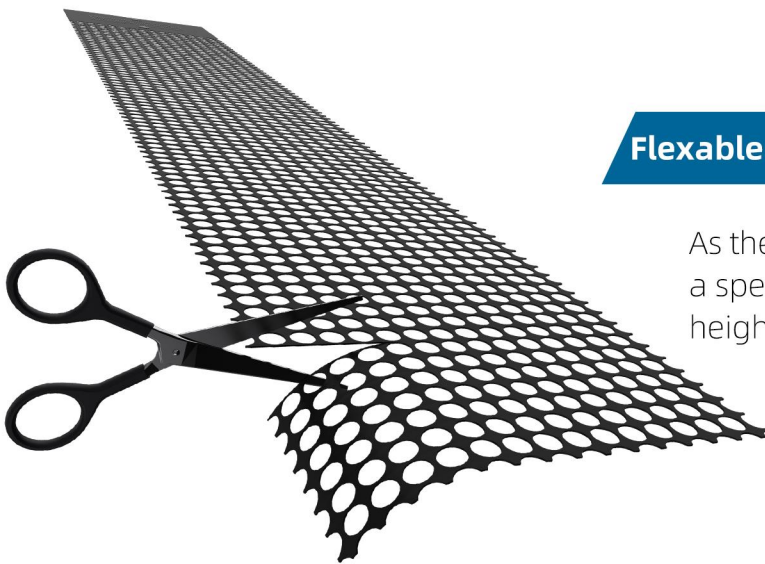

Flexible size could fit all different windows

As the actual window size varies. Through a special PCB design, both the width and height can be customized.

Depth less than 2mm

It resembles a black fishing net less than 2mm thick adhered to the window. The design is so slender that the product and the glass seem to be integrated. In this manner, people will be more engrossed and appreciate the marvellous content.

2mm




The luminance of the B series can soar as high as 5,000 Nits, while the surface adopts a matte black finish. This guarantees that the video content will shine conspicuously and turn into the most captivating presence in any extraordinary environment.

brightness is 5000nits could always catching up the attention




Parameters

Model	TM4	TM6
Pixel Pitch (mm)	3.91	6.25
Pixel Density (dots/m?)	65536	25600
Prerceptual Transparency	90%	
LED Configuration	1R1G1B	
Brightness (cd/m?)	5000	
Viewing Angle (H/V)	160/160	
Minimum Viewing Distance (m)	4	6
Gray Scale (bits)	14bit	
Power Consumption (Max./Avg.)(W/m?)	800/200	
Work Voltage (V)	AC100-240	
Refresh Rate (Hz)	≥3840(7680Hzis optional)	
Brightness Adjustment	0-100%	
Color Temperature (K)	5,500-9,500(Adjustable)	
Operation System	Windows7/10/11	
Control Mode	Synchornous/Asynchronous	
Control Distance (m)	<100(Cable); ≥100(Optical fiber transmission)	
Storage Temperature (°C)	-40~+85	
Operating Temperature (°C)	-20~+50	
Operating Humidity	10-90% RH	
Life Span (Hours)	10000	
MTBF (Hours)	5000	
IP Rating (FrontRear)	IP30/IP30	
Maintenance	Rear	
Installation	Rear	
Certifications	CE,FCC,ETL	

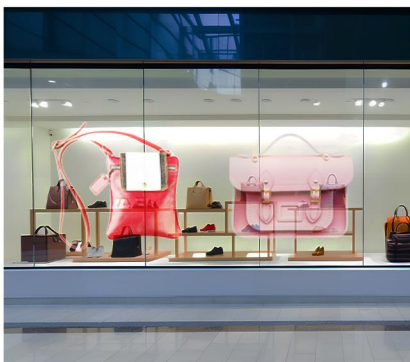

Luggage shop effect

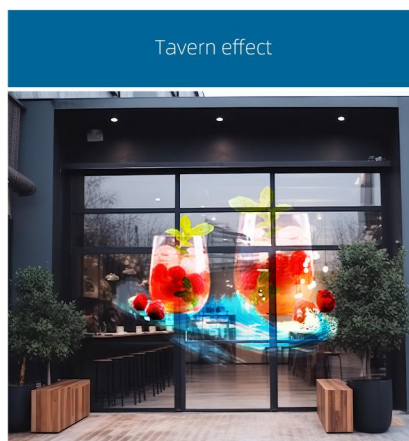

Tavern effect



Clothing store effect

TM
SERIRS



Could Visual Tech Limited

Email: marketing@cloudvisualtech.com
Tel: +86 159 8957 8955
Add: 10 Kaijing North Road, Pingshan
District Shenzhen 518118, China.